



High Standards. Higher Performance. Highest Temperatures.

Huyglas[®] 1607 from Filtration Specialties, Inc. Specifications


High Efficiency Collection with Low Risk of Burning or Blinding

Features and Benefits

- Used in product collection/emissions control applications with high dust loads and rigorous cleaning
- 525°F (274°C) operating temperature, higher than Ryton[®], Nomex[®] or P84[®]
- Typical applications include carbon black production and lime kilns
- Reduced risk of blinding from liquid hydrocarbon carryover than with ePTFE membrane
- Meets particulate emission and opacity regulations in any routine application
- Lower ΔP and emissions than any synthetic felt or woven glass media
- Less prone to installation/handling damage than ePTFE membrane
- **Huyglas[®] 1607** has been in use since the late 1970's in a variety of demanding applications
- **Huyglas[®] 1607** is much easier to handle than the original "Huyck Felt" with similar efficiency

Test Results

- Testing performed by a nationally recognized independent testing lab
- Circulating Fluidized Bed Boiler Dust loaded at 3 Grains/ACF
- A/C ratio of 4.5:1
- Median particle size by count is 0.44 μ with 88% of particles finer than 1 μ in diameter

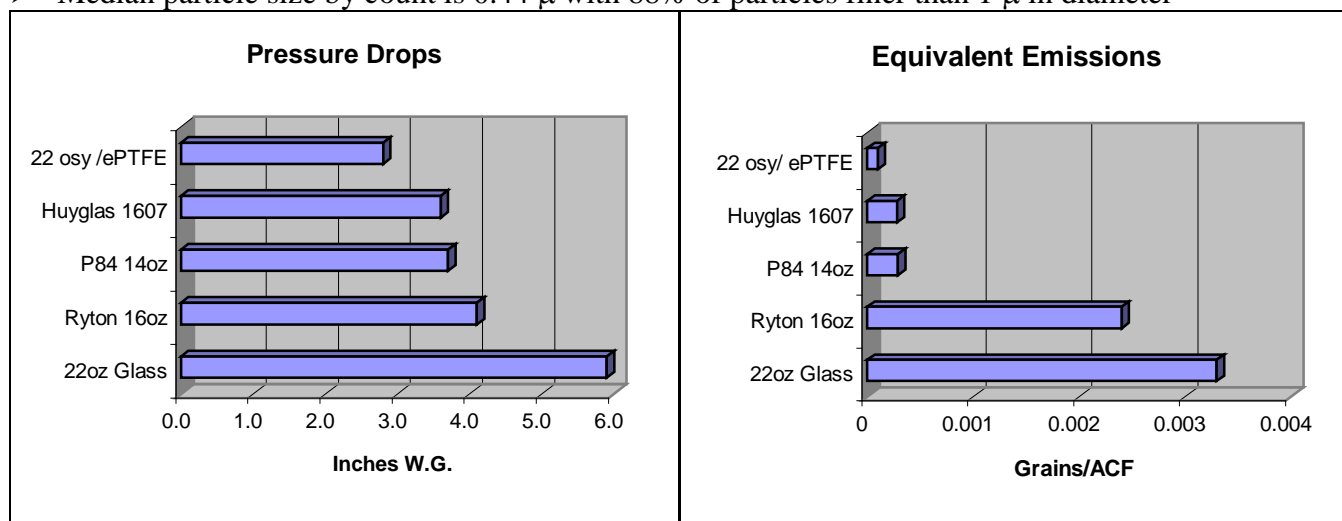

Specifications

- Base scrim: 100% Fiberglass
- Batt fiber: 100% Fiberglass
- Chemical resistant finish: Silicone-based resin
- Nominal weight/width: 27 oz/yd² (915 g/m²) and 63" (160 cm) width
- Permeability: 35 +/- 12 cfm/ft² @ 0.5" (10.7 +/- 3.7 m³/min/m² @ 12.7mm) H₂O

High Temperature Fiber Materials

+1-757-363-9818
 +1-917-464-9889
 Sales@HighTempFelt.com

Voice
 Fax
 Email

<http://www.HighTempFelt.com>